


## ■ Performance Curve



### Strong & Durable Subaru Engine

- Highly effective Mechanical Seal made with special Carbon Ceramics provides extra durability.
- Entire unit is protected by sturdy Rollover pipe Frame.
- Strong and lightweight die-cast Aluminum pump.

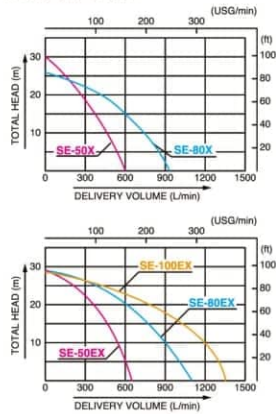

Model	SE-50X	SE-80X	SE-100X
Connection dia. (mm)	50 (2")	80 (3")	100 (4")
Connection thread	Outer pipe thread		
Delivery head (m)	30	26	28
Delivery volume (L/min)	600	930	1450
Suction lift (m)	8		
Engine	Subaru/Robin		
Engine model	EY15-3D	EY20-3D	EY28-3D
Engine type	Forced air-cooled 4-stroke gasoline engine		
Exhaust volume (ml)	143	183	273
Output power (kW/rpm)	2.6/4000	3.7/4000	5.5/4000
(HP/rpm)	3.5/4000	5.0/4000	7.5/4000
Fuel	Automotive unleaded gasoline		
Fuel tank capacity	2.8	3.8	5.5
Continuous operating time	~ 2 hrs 40 mins	~ 3 hrs	
Starting method	Recoil starter		
Standard accessories	1 strainer, 2 hose couplings, 3 hose bands, 1 engine tool set		
	23	34	55
	489 x 340 x 435	535 x 380 x 487	650 x 453 x 660
	1		